label sticker:

| MODEL | INPUT | TORQUE | SPEED | OPERATING TIME |
|---|---|---|---|---|
| CM-45 TUBULAR MOTOR | USB-C 5V ⎓ 6W | 0.5 NM | 28 RPM | 12 MIN |

Motionblinds

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interierence, and (2) this device must accept any interference received, including interference that may cause undesired operation. FCC ID: ZY4CMD03B1


IP 20 Conforms to ANSI/CAN/ UL Std. 325

Coulisse B.V. Vonderweg 48, 7468 DC Enter, The Netherlands | www.motionblinds.com


CM-45-R3

| (25/28/30/32/35/38 tube) | Standard 28rpm | |
|---|---|---|
| **drop in meters:** | **Average cycles** | **Average max runningtime minutes** |
| 1 | 600 | 440 |
| 1,5 | 430 | 480 |
| 2 | 350 | 500 |
| 2,5 | 320 | 500 |
| 3 | 250 | 500 |
| * Based on one cycle per day | | |


For battery preservation: charge 1x a year

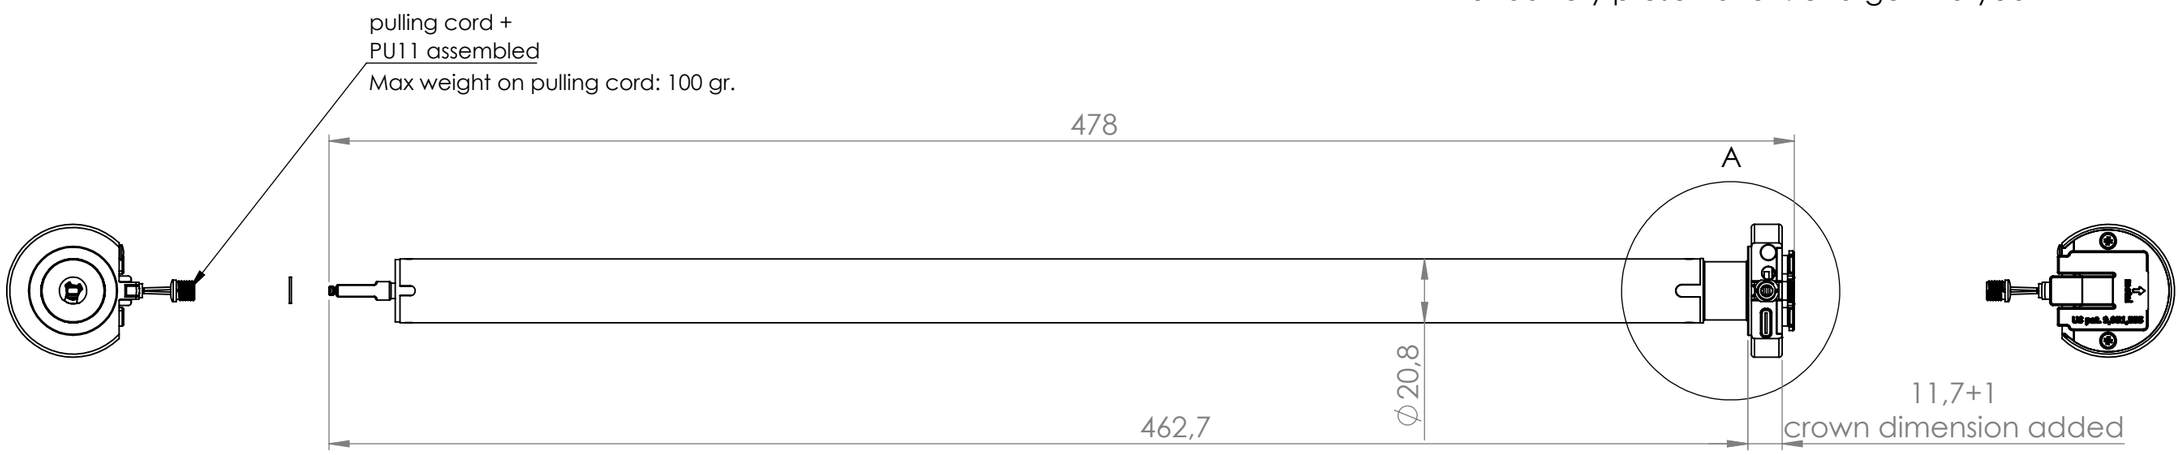


component click plate



setup code placement (bluetooth):
*on setup tassel
*on motor, opposite side of label

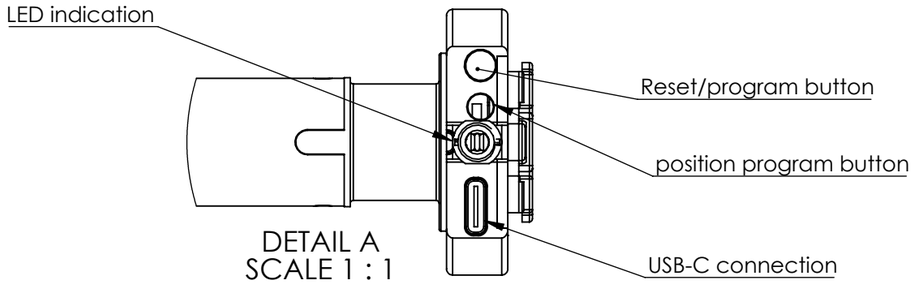


| Art.code: CM-45 | |
|---|---|
| | |
| max torque full battery (Nm) | 0,5 |
| speed full battery (rpm) | 20/28/34 |
| speed choice bluetooth (low, medium, high) | Yes |
| Nominal capacity (mAh) | 2600 |
| Stored energy (Wh) | 18,72 |
| Voltage (VDC) | 8.4 |
| Voltage (2 x 3,7 - 2 x 4,2) (V) | 7.4 - 8.4 V |
| operating temperature | 5-60 °C |
| charging time (h) | 6-8 |
| (EN13120 class2) life cycle time guaranteed (cycles) | 10.000 |
| Motor weight (grams) | 330 |
| Battery weight (grams) | 96 |

Article Nr.: CM-45

Description:

Tubular motor pull battery 21 mm 0.5Nm 28rpm

Projection

SCALE:1:2

COULISSE since 1992

Material:
Material <not specified>

CUSTOMER DRAWING - NOT FOR PRODUCTION

A3

Weight (approximately):
0.00 gramms

Drawing Nr. 00077931

© Copyright Coulisse 2020