label sticker:

MODEL	INPUT	TORQUE	SPEED	OPERATING TIME
CM-05-E TUBULAR MOTOR	USB-C 5V ⎓ 22W 1.6A	2.0 NM	28 RPM	12 MIN

Motionblinds

powered by eve. Motionblinds

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interierence, and (2) this device must accept any interference received, including interference that may cause undesired operation. FCC ID: ZY4CM05E


IP 20 III Powered by eve Intertek 5011728 Conforms to UL Std. 325

Coulisse B.V. Vonderweg 48, 7468 DC Enter, The Netherlands

M-range (38/42/50 tube)	Standard 20rpm	
drop in meters:	Average cycles	Average max runningtime minutes
1	525	350
1,5	400	400
2	320	425
2,5	270	425
3	220	420
3,5	180	400
4	150	400

L-range (65 tube)	Standard 20rpm	
drop in meters:	Average cycles	Average max runningtime minutes
1	600	275
1,5	450	300
2	350	320
2,5	300	325
3	240	320
3,5	200	300
4	175	295
* Based on one cycle per day		

for battery preservation: charge 1x a year

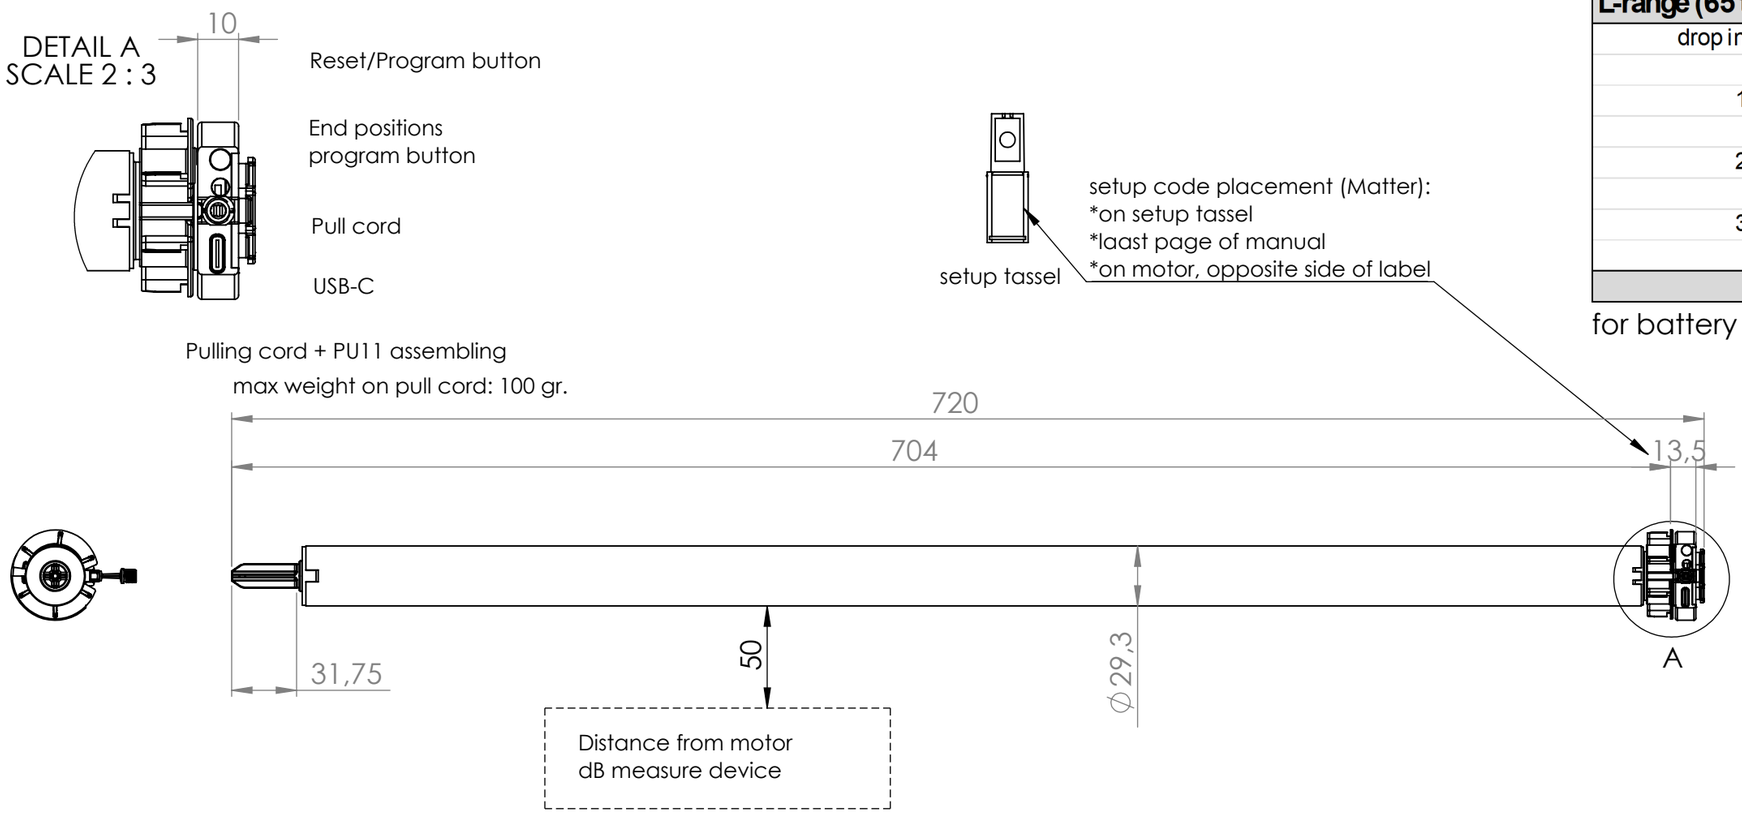

Art.code: CM-05-E	
max torque full battery (Nm)	2,0
speed full battery (rpm)	10/16/20/24/28
max torque speed control guaranteed (Nm)	1,1
speed choice bluetooth (low, medium, high)	Yes
Voltage (VDC)	12
Nominal Capacity (mAh)	2600
Stored energy (Wh)	28,08
Voltage (3 x 3,7 - 3 x 4,2) (V)	11,1-12,6
operating temperature	5-60 °C
Motor weight (grams)	970
Battery weight (grams)	165

CERTIFICATES			
CE	ETL	FCC	RoHS

Article Nr.: CM-05-E

Description:

Tubular motor pull battery EVE 28mm 2Nm BLE

Projection

SCALE:1:3

COULISSE since 1992

Material:
Material <not specified>

Weight (approximately):
0.00 gramms

CUSTOMER DRAWING - NOT FOR PRODUCTION

A3

Drawing Nr. 00080887

© Copyright Coulisse 2020